


Double Row Tapered Roller Bearing □ Inch Series □

VISTA®
Bearing

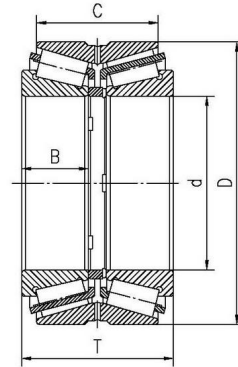

Bærer NEJ.	Grænsemål □mm□							Struktur	Værdi				Grundlæggende belastningsvurderinger (kN)		Begrænsningshastighed (o / min)		Vægt (kg)
	d	D	T	B	C	R _{smin}	r _{s min}		e	Y1	Y2	Y0	Cr	Cor	Fedt	Olie	
598/592DC	92.075	152.4	82.55	36.322	63.55	3.5	0.6	1	0.44	1.54	2.3	1.51	297	547	1800	2400	5.74
90.81/90744K	96.938	188.912	107.59	31.75	46.038	3.5	3.3	3	0.87	0.77	1.15	0.76	466	702	1800	2400	11.6
687/672D	101.6	168.275	92.075	41.275	69.85	3.5	0.5	1	0.47	1.43	2.12	1.4	357	648	1800	2400	8.18
861/854D	101.6	190.5	127	57.5	101.6	8	1.5	1	0.34	1.92	2.92	1.92	606	1020	1800	2400	15.6
HM926749/HM926710D	127.792	228.6	115.888	49.428	84.138	3.5	2.3	1	0.44	1.55	2.31	1.52	70	1142	1400	1900	18.9
31326X.K11.A160.200	130	280	144	44	66	1.5	4	6	0.83	0.83	1.22	0.8	1086	1649	1400	1900	40.4
442210	140	2000	93.665	42	73.025	5	1	1	0.31	2.18	3.24	2.13	422	917	1300	1700	9.2
31328X.K11.A180.230	140	300	154	47	70	1.3	4	6	0.83	0.82	1.22	0.8	1244	1910	1300	1700	51
99575/99102CD	146.05	254	149.255	66.675	111.125	7.1	1.5	1	0.41	1.65	2.77	1.82	967	1887	1300	1700	28
31330X.K11.A180.230	150	320	164	50	75	2	4	6	0.83	0.82	1.22	0.8	1414	2196	1200	1500	59.6
NA46790/SW/46720CD	165.1	225.425	95.25	47.625	69.85	3.5	0.8	2	0.4	1.7	2.53	1.66	400	1120	1150	1400	10.5
173KH350+K	173	350	155	58	155	5	4	4	0.43	1.59	2.36	1.55	1500	2550	1000	1300	70.7
HM237546DW/HM237510	177.8	288.925	123.825	47.625	123.825	1.5	3.3	4	0.32	2.12	3.15	2.07	1085	2050	940	1300	32
LM241149NW/LM241110D	203.2	276.255	95.25	47.625	73.025	3.5	0.8	2	0.32	2.12	3.15	2.07	590	135	940	1300	14.9
M541349/M541310D	203.2	292.1	109.538	49.212	84.138	3.5	0.8	1	0.4	1.68	2.5	1.64	825	1710	940	1300	21.9
220KBE30+L	220	340	90	39	80	3.5	1.3	1	0.4	1.69	2.52	1.65	725	1178	840	1100	30.8
EE126098/126151CD	249.25	381	171.45	76.2	127	6.4	1.5	1	0.52	1.29	1.92	1.26	1407	3066	690	920	63.4
LM249747NW/LM249710D	253.975	347.662	101.6	42.862	69.85	3.5	1.5	2	0.33	2.04	3.03	1.99	775	1650	630	840	23.8
HH255149D/HH255110	279.4	457.2	244.475	106.363	244.475	1.5	6.4	4	0.33	2.02	3.01	1.97	3670	8440	580	770	181
45T564624T	279.4	457.2	244.48	94	244.48	6	6	5	0.33	2.03	30.2	1.98	2743	5863	580	770	166.5
HH258249TD/HH258210	303.212	495.3	263.255	114.3	263.252	3.3	6.4	5	0.33	2.03	3.02	1.98	4023	9363	500	660	223.8
L357049NW/L357010CD	304.81	393.7	107.95	53.975	82.55	6	1.5	2	0.36	1.9	2.83	1.86	905	2260	500	660	30.6
332169A	305.07	500	200	60	200	6.4	4.8	4	0.87	0.77	1.15	0.76	2100	4300	500	660	147.7
LM961548/LM961511D	342.9	457.089	142.875	63.5	101.6	3.3	1.5	1	0.71	0.95	1.41	0.93	1254	3411	480	630	60.4
L163149/L163110CD	355.6	444.5	136.525	60.325	111.125	3.6	1.5	1	0.31	2.2	3.27	2.15	1133	3538	420	560	44.6
NA231400/231976CD	355.6	501.65	146.05	73.025	107.95	6.4	1.5	2	0.37	1.8	2.69	1.76	17/62	3853	410	540	88
HM265049/HM565010D	368.249	523.875	214.312	101.6	169.862	6.4	1.5	1	0.33	2.03	3.02	1.98	2714	6903	410	540	143
HM265049TDS/HM265010S	368.3	523.875	185.738	79.357	185.738	3.3	6.4	6	0.33	2.03	3.02	1.98	3165	7555	410	540	134.3
M270749ADW/M270710	447.675	635	223.838	95.25	223.838	3.3	6.4	4	0.33	2.02	3	1.97	4317	11416	320	440	239
EE243196/243251CD	498.475	634.873	177.8	80.962	142.875	6.4	1.3	1	0.34	1.97	2.93	1.92	2356	6893	320	440	132.2